

**Operation and maintenance**  
**manual for**

**METAL SEATED  
GLAND PACKED  
FLANGED  
GATE VALVES  
WITH OPENING  
INDICATOR**

**P/N  
2509**

Approved for use by

President of Factory, JAFAR S.A.

Failure to comply with the guidelines and instructions in this Operation and Maintenance Manual releases the manufacturer from all obligations, liability and guarantee.

Due to continuous business development, we reserve the right to introduce modifications and structural changes to the presented product.

## CONTENTS

1	TECHNICAL DESCRIPTION .....	3
1.1	PRODUCT DESIGNATION AND IDENTIFICATION.....	3
1.2	USE .....	3
1.3	TECHNICAL SPECIFICATION.....	3
2	DESIGN .....	3
2.1	DESCRIPTION OF THE VALVE DESIGN .....	3
2.2	MATERIALS .....	4
2.3	DIMENSIONS .....	5
2.4	REFERENCE STANDARDS .....	6
2.5	ORDERING INFORMATION .....	6
2.7	MARKINGS .....	7
3	PROTECTION, STORAGE & TRANSPORT .....	7
3.1	PROTECTIVE COATINGS .....	7
3.2	PACKAGING .....	7
3.3	STORAGE .....	7
3.4	TRANSPORT .....	8
4	ASSEMBLY AND INSTALLATION .....	8
4.1	ASSEMBLY GUIDELINES.....	8
4.2	ASSEMBLY INSTRUCTIONS.....	9
4.3	OPERATION .....	9
4.4	OCCUPATIONAL HEALTH AND SAFETY .....	9
5	WARRANTY TERMS AND CONDITIONS.....	10

## 1 TECHNICAL DESCRIPTION

### 1.1 PRODUCT DESIGNATION AND IDENTIFICATION

The subject of this Operation and Maintenance Manual is:

TYPE 2509 metal seated gland packed wedge gate valve

- bore with recess underneath the wedge
- wedge (closure) with metal sealing rings made of bronze
- non-rising spindle
- stem sealed with braided gland packing

### 1.2 USE

The TYPE 2509 metal seated gland packed wedge gate valves are intended for industrial marine systems for sea water, heating installations and other chemically inert liquids. The valves are intended for overground and underground (vaulted) installations and must be installed horizontal pipelines in industrial systems.

### 1.3 TECHNICAL SPECIFICATION

The metal seated gland packed wedge gate valves with hard seals are intended for transporting of the specified media and other liquids as agreed with the manufacturer.

- Temperature: -10°C to +120°C
  - up to 120°C with bronze rings
- Nominal diameter (dimension) range: DN40 to DN600 [mm]
- Maximum medium flow rate:
  - liquid: max. 4 [m/s]
  - gas: max. 30 [m/s]

- The driving torque at opening start and closing end is as listed below:

DN [mm]	40	50	65	80	100	125	150	200	250	300	350	400	500	600
Mmax [Nm]	55			80			100		200		300		400	

- Valve control mode: the standard version of gate has the clockwise closing sense of rotation. The closing sense of rotation can be opposite on special order.

- The valve connection flange design is acc. to PN-EN 1092-2: 1999 with the sizes compliant with the nominal pressure values.
- Installation length: PN-EN 558-1: 2012 Series 14 - TYPE 2509

- Nominal pressure PN values:
  - 1.0 MPa
  - 1.6 MPa

## 2 DESIGN

### 2.1 DESCRIPTION OF THE VALVE DESIGN

The TYPE 2509 metal seated gland packed wedge gate valves manufactured by F.A. JAFAR S.A. feature a bore with a recess underneath the wedge, a non-rising stem, and an O-ring stem seal installed in the valve cover. The stem seal is made as a sealing assembly with five (5) braided gland packings. The gate valve closure is a metallic seals (with rings pressed into the wedge and the valve body seat) with the replaceable spindle nut on the wedge lug. The top section of the valve cover is the gland packing unit which keeps the flow control head sealed. The gate valve stem is a cylindrical shaft tipped with a trapezoid thread at the bottom, which is the drive section,


whereas the top tip is designed to match the control element. The valve cover is bolted tight to the valve body. The valve cover to body seal is an asbestos-free formed gasket. All inner and outer cast-iron surfaces of the valve are polyvinyl coated. The spindle is manually driven by a hand wheel.

## 2.2 MATERIALS

The table below lists the structural materials of the metal seated gland packed wedge gate valves with soft seals.

Item	Part designation	Material	Reference standard
1	Body	Spheroidal cast-iron, EN-GJS 400-15, EN-GJS 500-7	PN-EN 1563: 2012
2	Cover	Spheroidal cast-iron, EN-GJS 400-15, EN-GJS 500-7	PN-EN 1563: 2012
3	Wedge	Spheroidal cast-iron, EN-GJS 400-15, EN-GJS 500-7	PN-EN 1563: 2012
4	Spindle	Steel grade 1.4021	PN-EN 10088-1: 2014
5	Packing gland	Spheroidal cast-iron, EN-GJS 400-15, EN-GJS 500-7	PN-EN 1563: 2012
6	Gland	Spheroidal cast-iron, EN-GJS 400-15, EN-GJS 500-7	PN-EN 1563: 2012
7	Pointer	Bronze	PN-EN 1982: 2010
8	Indicator dial	Steel grade 1.4057	PN-EN 10088-1: 2014
9	Spindle nut	Bronze	PN-EN 1982: 2010
10	Seal	Carbon seal, DN40-DN300: PTFE + carbon; DN350 DN600	acc. to manufacturer's Technical Guidelines
11	Valve cover gasket	Asbestos-free carbon gasket, DN40-DN300; AF300 – DN350-DN600	acc. to manufacturer's Technical Guidelines
12	O-ring seal	Bronze	PN-EN 1982: 2010
13	Bolt	Steel, 1.0038 – DN40-DN300: Fe/Zn5 Stainless steel, A2– DN350-DN600	PN-EN ISO 4017:2011
14	Nut	Steel, 1.0038 – DN40-DN300: Fe/Zn5 Stainless steel, A4–DN350-DN600	PN-EN ISO 4032:2013
15	Handwheel	Grey cast iron, EN-GJS 250	PN-EN 1561: 2012

## 2.3 DIMENSIONS

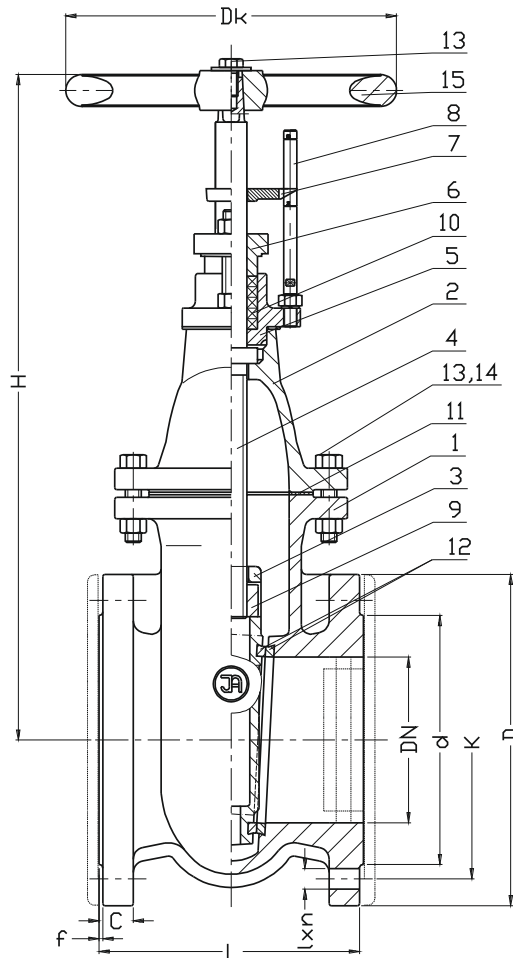

DN	PN	L	H	d PN16 (PN10)	D PN16 (PN10)	K PN16 (PN10)	C	f	I PN16 (PN10)	n	Dk	LH thread
[mm]	[bar]	[mm]								-		
40	PN10/16	140	245	84	150	110	19	3	19	4	160	Tr12X3
50		150	255	99	165	125	19	3	19	4	160	Tr12X3
65		170	277	118	185	145	19	3	19	4	160	Tr16X4
80		180	303	132	200	160	19	3	19	8	160	Tr16X4
100		190	340	156	220	180	19	3	19	8	200	Tr20X4
125		200	407	184	250	210	19	3	19	8	200	Tr20X4
150		210	474	211	285	240	19	3	23	8	200	Tr22X5
200		230	558	266	340	295	20	3	23	12	250	Tr22X5
250		250	669	319	405 (395)	355 (350)	22	3	28 (23)	12	250	Tr26X5
300		270	770	370	460 (445)	410 (400)	25	4	28 (23)	12	320	Tr28X5
350		290	900	429	520 (505)	470 (460)	27	4	28 (23)	16	320	Tr32X6
400		310	975	480	580 (565)	525 (515)	28	4	31 (28)	16	320	Tr32X6
500		350	1180	609 (582)	715 (670)	650 (620)	32	4	34 (28)	20	630	Tr40X6
600		390	1355	720 (682)	840 (780)	770 (725)	36	5	37 (31)	20	630	Tr40X6

## 2.4 REFERENCE STANDARDS

PN-EN 1074-1: 2002	Valves for water supply. Fitness for purpose requirements and appropriate verification tests. General requirements
PN-EN 1074-2: 2002	Valves for water supply. Fitness for purpose requirements and appropriate verification tests. Isolating valves.
PN-EN 1171: 2007	Industrial valves. Cast iron gate valves.
PN-89/H-02650	Valves and pipelines. Pressure and temperature ratings.
PN-EN 1092-2: 1999	Flanges and their joints. Circular flanges for pipes, valves, fittings and accessories, PN designated. Cast iron flanges.
PN-EN19: 2005	Industrial valves. Marking of metallic valves
PN-EN 12266-1: 2012	Industrial valves. Testing of metallic valves. Pressure tests, test procedures and acceptance criteria. Mandatory requirements.
PN-EN 558: 2012	Industrial valves. Face-to-face and centre-to-face dimensions of metal valves for use in flanged pipe systems. PN-designated valves.
PN-EN ISO 6708: 1998	Pipework components. Definition and selection of DN (nominal size).
PN-EN 1559-1: 2011	Founding. Technical conditions of delivery. General.
PN-EN 1561: 2012	Founding. Grey cast irons.
PN-EN 1563: 2012	Founding. Spheroidal graphite cast irons.
PN-EN 1370: 2012	Founding. Surface roughness inspection by visual tactile comparators.
PN-EN 10088-1: 2014	Stainless steels. List of stainless steels.
PN-74/H-84032	Spring steel. Grades.
PN-EN 1982: 2010	Copper and copper alloys. Ingots and castings.
PN-EN 12420: 2002	Copper and copper alloys. Forgings.
PN-ISO 965-1: 2001	General purpose ISO metric threads. Tolerances. Principles and basic data.
PN-ISO 2903: 1996	Trapezoid ISO metric threads. Tolerances.
PN-EN ISO 4762: 2006	Hexagon socket head cap screws.
PN-EN 10204: 2006	Metallic products. Types of inspection documents.
PN-ISO 1629: 2005	Rubbers and latices. Nomenclature.
PN-EN ISO 1872-1: 2000	Plastics. Polyethylene (PE) moulding and extrusion materials. Designation system and basis for specifications.
PN-EN ISO 1873-1: 2000	Plastics. Polypropylene (PP) moulding and extrusion materials. Designation system and basis for specifications.
PN-EN ISO 1874-1: 2010	Plastics. Polyamide (PA) moulding and extrusion materials. Designation system and basis for specification.
PN-EN ISO 12944-5: 2009	Paints and varnishes. Corrosion protection of steel structures by protective paint systems. Protective painting systems.

## 2.5 ORDERING INFORMATION

Water supply system valves are specific purpose industrial valves, therefore orders must include:

- part number (P/N, equal to the product type);
- intended use, e.g. for water supply systems,
- and:
- nominal diameter, acc. to PN-EN ISO 6708: 1998
- nominal pressure, acc. to PN-89/H-02650;
- type of body material — acc. to PN-EN 1561: 2012 or PN-EN 1563: 2012
- maximum operating temperature, acc. to PN-89/H-02650.

## **2.6 PRODUCTION AND ACCEPTANCE**

The TYPE 2509 metal seated gland packed wedge gate valves are accepted and manufactured in accordance with: PN-EN 1074-2: 2002 (Valves for water supply. Fitness for purpose requirements and appropriate verification tests. Isolating valves) and PN-EN 12266-1: 2012 (Industrial valves. Testing of valves). All gate valves are leak tested (100%). The tests include external body tightness and closing tightness.

## **2.7 MARKINGS**

The gate valve marking meets the following standards: PN-EN-19: 2005, PN-EN-1171: 2007.

The gate valve bodies feature markings on the front and back walls of the body chamber. The marking contains the following data:

- valve type (defined by the product reference standard number)
- nominal diameter
- nominal pressure
- body material type
- manufacturer trademark

The location on the valve specified in the documentation features the nameplate which contains the following data:

- manufacturer's company name and logo
- serial number
- sealing temperature rating
- construction mark "B" and/or mark "CE" (as applicable)
- product type.

## **3 PROTECTION, STORAGE & TRANSPORT**

### **3.1 PROTECTIVE COATINGS**

All inner and outer cast-iron surfaces are protected with grey polyvinyl coat.

The anti-corrosion coating layer minimum thickness is 100µm.

The casting surface is pre-treated for polyvinyl coating in accordance with the relevant technical documentation and PN-EN ISO 12944-5: 2009.

The screws connecting the body and the cover are manufactured as stainless, grade 1.4301 or Fe/Zn5 (galvanised steel).

### **3.2 PACKAGING**


The gate valves are packed on EURO pallets (1200x800) and protected with heat-shrunk film.

### **3.3 STORAGE**

Store the gate valves in sheltered rooms.

### 3.4 TRANSPORT

Transport the gate valves on sheltered vehicles.  
Never suspend the valve by its drive actuator when handling.

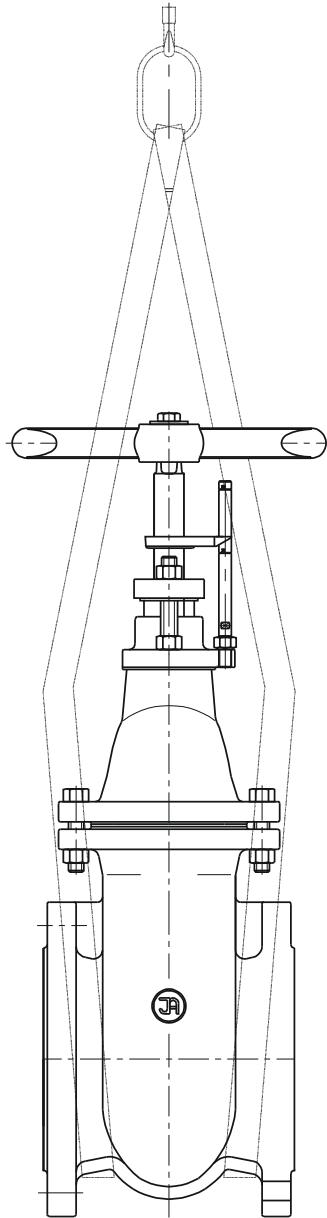

It is recommended use belt slings as shown in the diagram above  
for handling and installation of the gate valves from DN50 to DN600.

## 4 ASSEMBLY AND INSTALLATION

### 4.1 ASSEMBLY GUIDELINES

The Type 2509 metal seated gland packed wedge gate valves can be installed in underground or overground pipelines both in horizontal or vertical orientation. The listed products are suitable for joining with



the flanged ends of pipelines with the size equal to that of the valve flanges. Note that the system must not expose the (gate) valve to bending or tensile stress from loading with the weight of unsupported pipeline sections. Assemble with consideration to pressure and temperature compensation of the pipeline. The valve assembled and adjusted by the manufacturer is ready for installation. Any dismantling of the valve components may result in loss of seal.


## 4.2 ASSEMBLY INSTRUCTIONS

Before attempting to install the valve, check the technical and commercial documents delivered with the product to verify that the media and pipeline operating parameters comply with the manufacturer's declaration. Any change in the operating conditions must be consulted with the valve manufacturer beforehand.

Before attempting to assemble the valve, remove the main bore plugs, check the inner surfaces of the valve and thoroughly flush with water, if necessary.

**CAUTION! If the product is damaged mechanically, do not install it in the pipeline.**

The figure below shows the method for coupling the gate valve and the valve orientation diagrams:

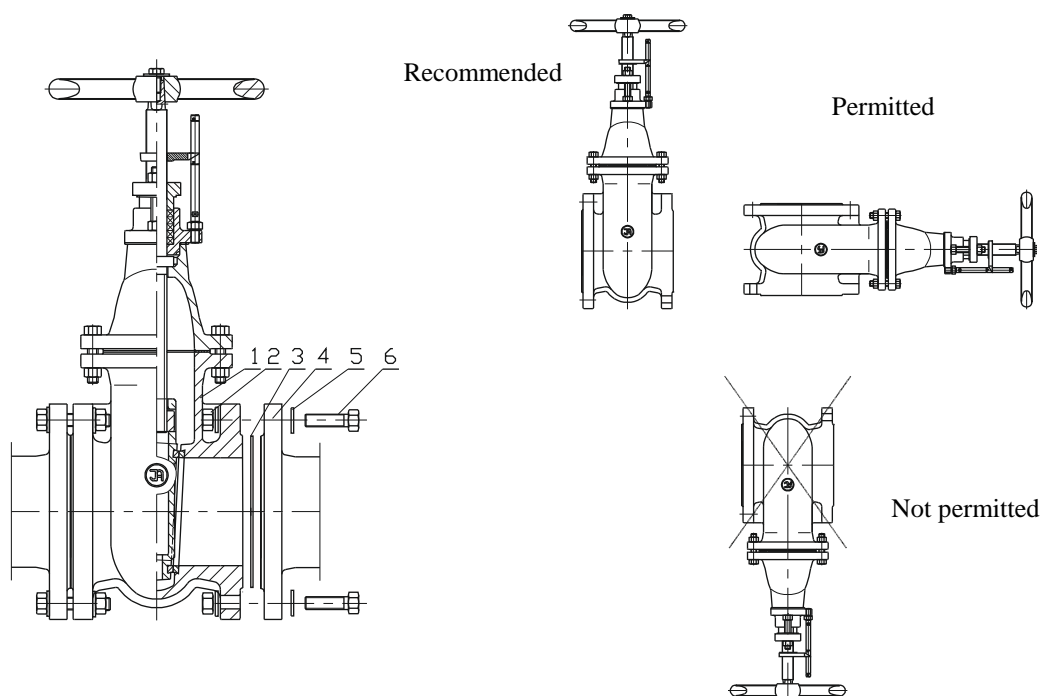

1. Valve; 2. Nut; 3. Gasket; 4. Pipeline flange; 5. Washer; 6. Fastening bolt

## 4.3 OPERATION

The gate valve shall be operated according to all relevant requirements for cut-off valves, i.e. either in fully open or fully closed positions. Leaving the gate valve partially opened (or closed) may result in seal failure. To ensure full performance, switch the knife gate valve periodically (once a year, from fully open to fully closed).

Exceeding the operating limits of the valve may result in damage that will not be covered by the suretyship granted by the manufacturer.

## 4.4 OCCUPATIONAL HEALTH AND SAFETY

The metal seated gland packed flanged gate valves are eligible for the OHS guidelines and recommendation concerning installation of pipelines and devices for water supply stations, heat power plants, water treatment plants, sewage treatment plants, pumping stations and other facilities, and eligible for the Polish

Regulation concerning general OHS laws (use of personal protective equipment for hands, legs and head, and safety garment), especially at work with low or high temperature hazard.

**Misuse of this product is prohibited.**

## **5 WARRANTY TERMS AND CONDITIONS**

The product assembled, installed and operated in compliance with this Manual is covered by a commercial warranty from the manufacturer. The conditions and period of the warranty is specified in the warranty sheet.